



Centrif® Duo Plus

Centrifugal Kitchen & Utility Room Fans

Features & Benefits

- **New and Improved.**
- **Installed performance meets Building Regulations.**
- **Optional filter available.**
- **Easy installation**
- **Fan can be wall or ceiling mounted.**
- **Reduced stocklines - fans now suitable for both kitchen and utility rooms.**
- **Pullcord, timer and humidistat models .**
- **Constant trickle boost speed available on D & HTP models.**

Ultra Quick Ventilation

Centrif Duo Plus is designed to provide extraction levels **that comply with Building Regulation (Document F) requirements**, with special humidity sensing variants for local authority use.

The Centrif Duo Plus is for kitchens and utility rooms and large bathrooms. Surface mounting directly into standard 100mm diameter ducting, through the wall or ceiling installation.

Fast installation

The Centrif Duo Plus has a 100mm circular spigot. The Flush mounting kit enables the

spigot to be converted to a side outlet. The spigot also encloses a built-in, spring operated back draught shutter. The Centrif Duo Plus Range can be wall mounted using a telescopic wall fitting kit available as an accessory (requires a 115mm diameter hole). For ceiling applications the range is ducted either through a soffit outlet or roof cowl assembly. There is convenient access for wiring which can be surface or recessed.

Improved Humidistat control for 2011

Humidistat is selectable for either kitchen or utility speed separate to any other control; to reduce nuisance noise. Boost operation by pullcord or switch live.

Models

Centrif Duo Plus P (Pullcord) DOM

Two speed kitchen extract fan with pullcord. Choice of two speeds for boost, set at installation.

Stock Ref
431613B

Centrif Duo Plus T (Timer) DOM

Two speed with adjustable timer between 2-30 minutes. Choice of two speeds for boost, set at installation.

Stock Ref
431614B

Centrif Duo Plus DP (Two speed) DOM

Two speed and Off with pullcord or remote switch. Switches between off, low and one of the 2 boost speeds

Stock Ref
431615B

Centrif Duo Plus HTP (Humidity) DOM

Intermittent on 1 of 2 speeds (Utility or Kitchen selectable at installation). Operation by integral humidity sensor or pullcord. Separate speeds selectable for humidistat and pullcord. Optional continuous trickle speed available at installation.

Stock Ref
431616B

Flush Mounting Kit DOM

Bezel, clips and 90° duct elbow reduces the need to make good

Stock Ref
439256



Centrif Duo Plus Filter DOM

Stock Ref
439927

Dimensions (mm)

A	B	C	D	E	FØ
231	261	140	79	58	98

Weight 1.75kg

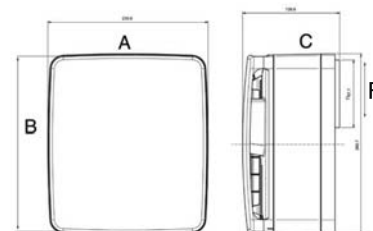

Wall Kit Stock Ref:

254102 (White)
254100 (Brown)

Decoration Frame Assembly

Stock Ref 442551

Performance

Performance @ 0 pa

Model	High speed		Med speed		Low speed		Power (w)			Sound (dBA@3m)		
	m³/h	l/s	m³/h	l/s	m³/h	l/s	Kitchen	Utility	Trickle	Kitchen	Utility	Trickle
Centrif Duo P	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A
Centrif Duo T	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A
Centrif Duo DP	220	61	130	36	90	25	60	41	9	51.8	38	21.5
Centrif Duo HTP	220	61	130	36	90	25	60	41	9	51.8	38	21.5