



# Centrif® Duo

## Centrifugal Kitchen & Utility Room Fans

### Features & Benefits

- New and Improved.
- 100mm circular spigot for speedy installation.
- Humidity sensing model for automatic operation.
- Reduced stocklines - fans now suitable for both kitchen and utility rooms.
- Removable grille assembly for easy cleaning.
- Speed set at installation.
- Complies with Building Regulation (Document F) requirements for extraction levels in kitchens, utility rooms and bathrooms.
- Timer model for internal rooms.
- Surface or recessed installation options.
- Includes washable grease filter

### Kitchen and Utility Ventilation

The Centrif Duo range is a series of 100mm centrifugal extract fans for the domestic environment. The range is designed to provide extraction levels **that comply with Building Regulation requirements**, with special humidity sensing variants for local authority use.

### Motor

The motor features greased-for-life ball bearings which allow the fan to be installed at any angle. Insulation is Class E. Double insulated appliance. Supply voltage 220-240V/1/50Hz.

### Performance

Performance @ 0 pa

Model	High speed		Med speed		Low speed		Power (w)			Sound (dBA@3m)		
	m³/h	l/s	m³/h	l/s	m³/h	l/s	Kitchen	Utility	Trickle	Kitchen	Utility	Trickle
Centrif Duo P	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A
Centrif Duo T	220	61	130	36	-	-	60	41	N/A	51.8	38	N/A
Centrif Duo DP	220	61	130	36	90	25	60	41	9	51.8	38	21.5
Centrif Duo HTP	220	61	130	36	90	25	60	41	9	51.8	38	21.5

### Fast installation

The Centrif Duo has a 100mm circular spigot. The Flush mounting kit enables the spigot to be converted to a side outlet. The spigot also encloses a built-in, spring operated back draught shutter. The Centrif Duo Range can be wall mounted using a telescopic wall fitting kit available as an accessory (requires a 115mm diameter hole). For ceiling applications the range is ducted either through a soffit outlet or roof cowl assembly. There is convenient access for wiring which can be surface or recessed.

### Improved Humidistat control for 2011

Humidistat is selectable for either kitchen or utility speed separate to any other control; to reduce nuisance noise. Boost operation by pullcord or switch live.

### Models

#### Centrif Duo P (Pullcord) DOM

Two speed kitchen extract fan with pullcord. Choice of two speeds for boost, set at installation.

**Stock Ref 256120D**

#### Centrif Duo T (Timer) DOM

Two speed with adjustable timer between 2-30 minutes. Choice of two speeds for boost, set at installation.

**Stock Ref 256220D**

#### Centrif Duo DP (Two Speed) DOM

Two speed and Off with pullcord or remote switch. Switches between off, low and one of the 2 boost speeds

**Stock Ref 256320D**

#### Centrif Duo HTP (Humidity) DOM

Intermittent on 1 of 2 speeds (Utility or Kitchen selectable at installation). Operation by integral humidity sensor or pullcord. Separate speeds selectable for humidistat and pullcord. Optional continuous trickle speed available at installation.

**Stock Ref 256420D**

#### Flush Mounting Kit DOM


Bezel, clips and 90° duct elbow reduces the need to make good.

**Stock Ref 439256**

### Dimensions (mm)

A	B	C	D	E	FØ
231	261	137	79	58	98

Weight 1.75kg

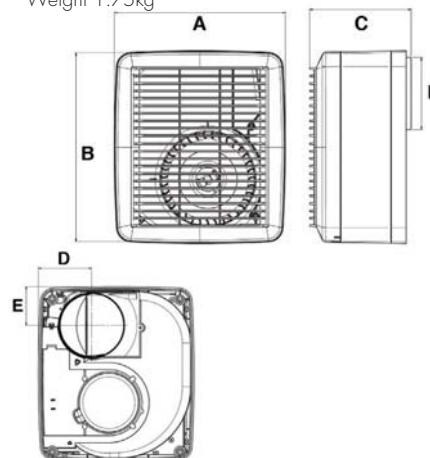

#### Wall Kit Stock Ref:

**254102 (White)**  
**254100 (Brown)**

Decoration Frame Assembly

**Stock Ref 442551**