

Lo-Carbon Minivent

Ducted Bath/ Shower Fan Kit



Features & Benefits

- IP44 rated
- Powerful axial in-line fan with downstream airflow guide vanes
- Complete kit supplied
- Meets Building Regulation Requirements for toilets and bathrooms
- Adjustable timer version available
- 5 Year Motor Guarantee
- 1 of 2 speeds selectable at installation'

in one box. This simplifies fitting of an efficient ventilation system to small rooms, including bath, shower rooms and toilets. It is especially suitable for en-suite bathrooms.

When installed the fan kit has ample performance to meet the Building Regulations Requirements for toilets and bathrooms. The timer version should be used for internal rooms.

The kit consists of a Lo-Carbon Minivent IP44 In-Line fan, a white ceiling grille and spigot, 3 metres of flexible duct and an external louvre for soffit or wall mounting. The duct should be cut to the required length and the bend radius kept to a maximum to provide the best fan performance.

Enclosed terminal compartment, Class 2 appliance. Supply voltage 220-240/1/50Hz.

Models

Lo-Carbon Minivent Shower Fan - Basic

Comprises - high output tube fan, 3 metres of flexible duct, ceiling inlet grille and spigot, soffit/wall outlet grille.

Stock Ref
441421

Lo-Carbon Minivent Shower Fan - Timer

Comprises - high output tube fan, 3 metres of flexible duct, ceiling inlet grille and spigot, soffit/wall outlet grille.


Stock Ref
441422

Powerful Lo-Carbon In-Line Fan Kit


The Vent-Axia Lo-Carbon Minivent ducted bath/shower kit includes all the components necessary to install a ducted 100mm system

Dimensions (mm)


A	BØ	C
80	98	138

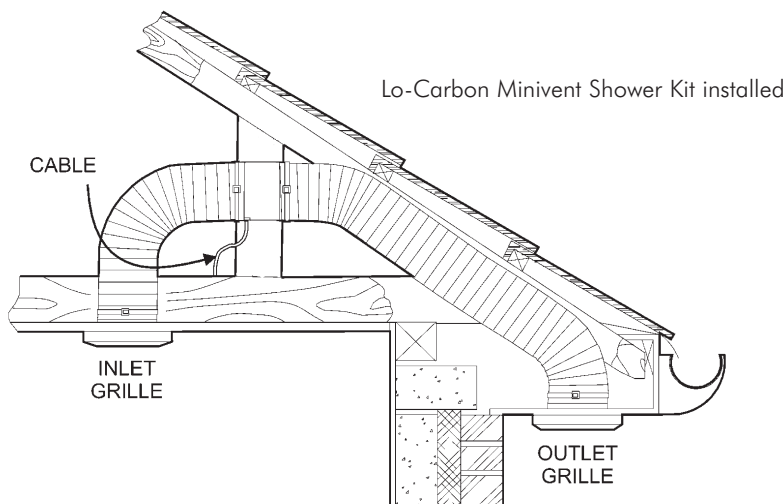

Rear View



Side View



Internal/External Grille Dimensions
170x170mm

Performance

Model	Extract performance - FID			Sound dB(A)	
	m ³ /h	l/s	Watts	@ 3m	SFP @ 0Pa
Lo-Carbon Minivent B	110	31	6.5	23	0.21
Lo-Carbon Minivent T	110	31	6.5	23	0.21