

# LuminAir® Turbo Fan & Light Ventilation Kit



### Features & Benefits

- Unique fan and light combination.
- IPX7 rated inlet assembly.
- Suitable for shower enclosures and wet areas - can be used within reach of a person using a bath or shower.
- Safety extra low voltage (SELV) lamp.
- Easy installation.
- White, Gold and Chrome bezels available.

### High Performance Fan & Light Combination

LuminAir is now additionally available in the form of a ventilation kit. The **IPX7** unit is installed directly over a shower in complete safety.

Vent-Axia LuminAir extracts moisture and humidity at source, preventing damaging condensation from spreading. At the same time it bathes the shower enclosure in a rich soft light - bringing any dark shower to life. Ideal for all types of bathroom and shower applications, and is particularly suitable for besit and en-suite shower installations.

### Models

#### LuminAir Turbo Ventilation Kit

For applications where a more powerful system is required. The kit comprises a LuminAir Turbo L or T mains fan and SELV light, choice of bezel, 90° bend, 6 metres of flexible duct, quick fix wall grille and four cable ties. **Meets Building Regulations (Document F)** performance assuming ductwork provided is fully extended and one 90° bend.

#### LuminAir Turbo SKL



Provides simultaneous On and Off operation of the fan and light from the bathroom light switch.

#### Stock Ref

**453419A** - White

#### LuminAir Turbo SKT



Switches the fan On with the light. When the light is switched Off, the fan continues to run for an adjustable fixed period to meet the Building Regulations for internal bathrooms.

#### Stock Ref

**453422** - White

#### Optional Bezels



#### Stock Ref


**452044** - Chrome

**452045** - Gold



### Dimensions (mm)

	AØ	BØ	C	D	E	F
Vent Light	150	180	10			
Turbo Fan	97	178	124	298	96	168
Ceiling Fixing hole diameter 110mm						

### Vent Light and Bend

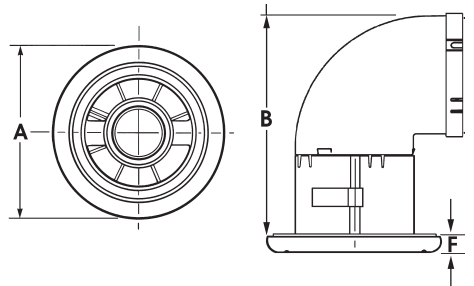

### Turbo Fan



### Performance

Model	Extract Performance - FID			Sound dB(A) @ 3m	Amps @ 240V
	m³/h	l/s	Watts		
LuminAir Turbo SKL	160	44	35	38	0.3
LuminAir Turbo SKT	160	44	35	38	0.3

### Transformer Dimensions

	Length	Width	Lid	Base
Transformer T&H	175	90	55	30
Transformer (L)	83	76	70	61
Humidity Sensor	87	87	33	

Fixing Hole diameter 110mm