

Silhouette®

100 SELV

Axial Bathroom/ Toilet Fans



Features & Benefits

- 17mm stylish ultra low profile grille.
- Downstream airflow guide vanes for improved pressure development.
- Designed for vertical or horizontal application.
- Fan IPX7 rated.
- SELV transformer to BSEN 60742.
- Modern aesthetic design with Blue Neon.
- Suitable for wall, ceiling, panel and window mounting.
- Meets Building Regulations Part F

Slimline Bathroom Ventilation

With a slim profile of only 17mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 26 l/s. Silhouette can be ceiling/panel mounted and connected to an appropriate duct run to the outside.



17mm actual profile



Back draught prevention vanes fitted on discharge

Models

Silhouette 100SVB DOM
Single speed 100mm, bathroom/toilet fan with neon running light and backdraught shutter.

Stock Ref
439974

Silhouette 100SVT DOM
Single speed 100mm bathroom/toilet fan with integral adjustable electronic overrun timer (up to 30 mins), neon running light and backdraught shutter.

Stock Ref
439975


Silhouette 100SVH DOM
Single speed 100mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, neon running light and backdraught shutter.

Stock Ref
439976


Dimensions (mm)

A	B Ø	C	D	E	F
160	99	77	90	200	32
Transformer (W X H X D) 147 X 86 X 65					
Weight 0.6kg					

Panel

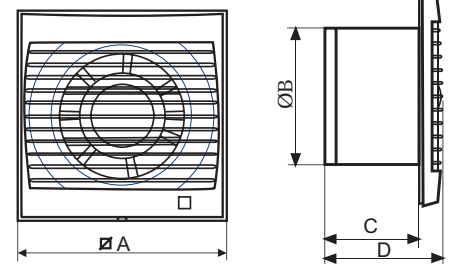

Wall



Fixing hole diameter 117mmØ

Wall Kit Stock Ref:

254102 (White)

254100 (Brown)

DOM

Performance

Model	Extract Performance - FID			Sound dB(A)
	m³/h	l/s	Watts	@ 3m
Silhouette 100SVB	95	26	18	37
Silhouette 100SVT	95	26	18	37
Silhouette 100SVH	95	26	18	37