

# VA140/150 Range Axial Kitchen Fans



## Features and Benefits

- VA140/150 Panel models.
- 2 Year Guarantee.
- Thermo electric shutters to prevent back drafts.
- Meets installed Building Regulations.
- IP44 rated.

## Kitchen ventilation

VA140/150 Panel models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

## Building Regulations

Specifically sized to **meet the Building Regulation requirements** for powered extract ventilation in domestic kitchens. All VA140/150 models have a Trickle Ventilation Control facility fitted as standard. The VA140/150 range is fitted with internal and external louvres conforming to the latest international safety standards.

Please contact our Customer Service Department for exposed site application.

## Models

### Kitchens

#### VA140/150KP - DOM

Single speed kitchen extract fan with On/Off pullcord. Trickle ventilation facility.

**Stock Ref**  
**140120A**

#### VA140/150KT - with timer DOM

Single speed kitchen extract fan with adjustable overrun timer 3-25 minutes. Trickle ventilation facility.

**Stock Ref**  
**140220B**

#### VA140/150KHP - with humidistat DOM

Single speed humidity-controlled kitchen extract fan with full speed pullcord override. Humidity adjustment 62-82%RH. Trickle ventilation facility.

**Stock Ref**  
**140320B**

#### VA140/150KHT - with timer and humidistat DOM

Humidity controlled kitchen extract fan with adjustable overrun timer (3-25 minutes). Humidity adjustment 62-82% RH. Trickle ventilation facility.

**Stock Ref**  
**140420B**

#### VA140/150VS - DOM

Variable speed kitchen extract with a built in adjustable speed controller, which can reduce the speed to 40% of its maximum performance.



**Stock Ref**  
**458915**

## Dimensions (mm)

A	B	C	DØ	E	FØ	G	H
216	224	80	146	60	152	220	37


Weight 1.75kg

### Window




Panel fixing hole Ø 152mm  
Window fixing hole Ø 160mm

### Wall

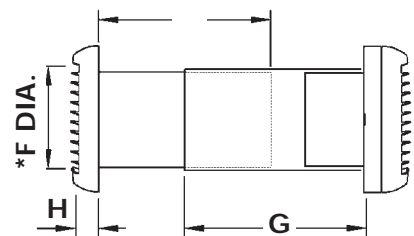

Wall fixing hole Ø 152mm

### Window



Wall/Window kits (see page 89)

## Performance

Model	Extract Performance FID				Sound	
	**Shutter Actuator	m <sup>3</sup> /h	l/s	Watts	dB(A) @ 3m	
VA140/150KP	PT	245	68	34	36	
VA140/150KT	T	245	68	34	36	
VA140/150KHP	T	245	68	34	36	
VA140/150KHT	T	245	68	34	36	
VA140/150VS	PT	100 low 245 boost	28 low 68 boost	34	36	

\*Select appropriate VA140/150 Panel model plus Wall or Window Fitting Kit

\*\*P = pullcord T = Thermo actuator