

# Vent-Axia®

## Universal Flat Roof Vent

Suitable for most residential applications with a Felt or Asphalt flat roof.


Covers Stock Ref Nos:- 407337, 407338 & 407339

### FIXING INSTRUCTIONS

Capped stacks for use in asphalt and built-up felt roofs. The pipework above the roofline is twin walled and incorporates an integral condensate drain. The stack pipe has an integral collar and separate aluminium flange for use with both felt and asphalt.


#### ASPHALT ROOFS

1. Decide on a suitable position for the Universal flat roof terminal between the rafters.
2. Create hole through underlay and base and temporary locate flange over hole.
3. Asphalt to be dressed up to neck of flange unit.
4. Shows completed installation.

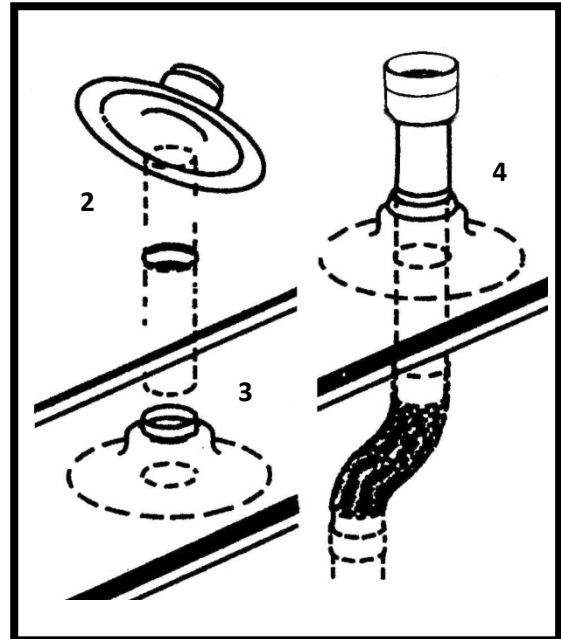

#### BUILT-UP FELT ROOFS

1. Bitumen bedding around hole in first layer of felt.
2. Shows intermediate felt layer.
3. Star cut hole in top layer of felt (cap may be removed).
4. 100mm upstand felt collar.

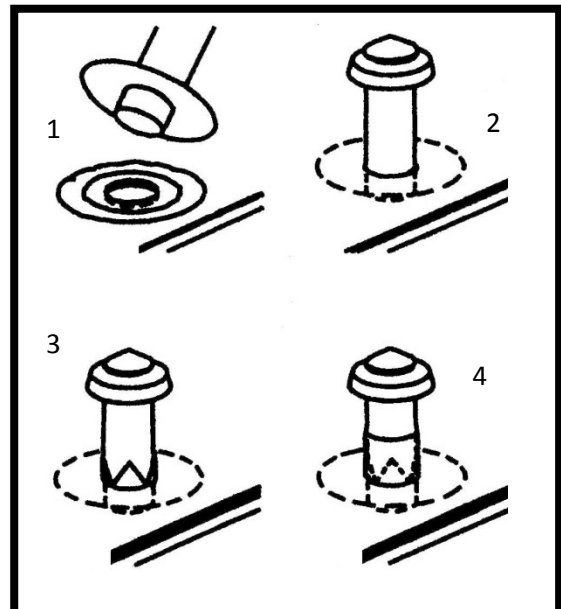

Head Office: Fleming Way, Crawley, West Sussex, RH10 9YX.

UK NATIONAL CALL CENTRE

Newton Road, Crawley, West Sussex, RH10 9JA SALES ENQUIRIES: Tel: 0844 8560590 Fax: 01293 565169

TECHNICAL SUPPORT: Tel: 0844 8560595 Fax: 01293 539209

For details of the warranty and returns procedure please refer to [www.vent-axia.com](http://www.vent-axia.com) or write to Vent-Axia Ltd, Fleming Way, Crawley, RH10 9YX