

# Silhouette 125

- 18mm stylish ultra low profile grille
- Downstream airflow guide vanes for improved pressure development
- Designed for vertical or horizontal application
- Modern aesthetic with indication light
- Fan IPX4 rated
- Suitable for wall, ceiling and panel mounting



## Slimline Bathroom Ventilation

With a slim profile of only 18mm, Silhouette blends in with the wall surface to provide an unobtrusive installation. Silhouette has a FID performance of 160m<sup>3</sup>/h. Silhouette can be wall, ceiling or panel mounted and connected to an appropriate duct run to the outside.



## Models

### Silhouette 125B

Single speed 125mm, bathroom/toilet fan with indication light and back draught shutter.

Model **B** Stock Ref **445161**

### Silhouette 125T (Timer)

Single speed 125mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indication light and back draught shutter.

Model **T** Stock Ref **445162**

### Silhouette 125H (Humidistat)

Single speed 125mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH, indication light and back draught shutter.


Model **H** Stock Ref **445163**

## Accessories



Model **Wall Kit** Stock Ref **445226**

## Dimensions (mm)

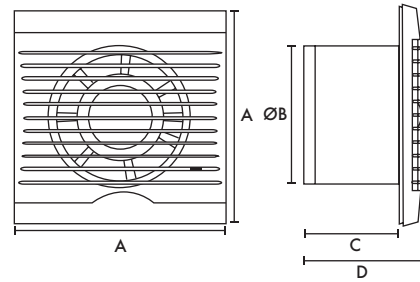

A	B Ø	C	D
187	125	131	149

## Performance Guide

Model	Extract Performance - FID			Sound dB(A)
	m <sup>3</sup> /h	l/s	Watts	@ 3m
Silhouette 125B/T/H	160	45	20	40