

# Lo-Carbon Silhouette 125

- Models Basic/Timer/Humidity & Timer
- Low power consumption - Lower running costs
- Quiet running
- Fully opening and closing non transparent shutters - Improved insulation and privacy
- 1 of 2 speeds selectable at installation
- IPX4 rated
- Ball bearing motors for vertical or horizontal application
- Unique humidity sensor track - Improved response
- 5 Year Motor Guarantee
- Suitable for wall, ceiling and panel mounting



## Slimline Bathroom Ventilation

With a slim profile of only 18mm, Lo-Carbon Silhouette blends in with the wall surface to provide an unobtrusive installation. Lo-Carbon Silhouette has a FID performance up to 160m<sup>3</sup>/h. It can be ceiling/panel mounted and connected to an appropriate duct run to the outside.

## Models

### Lo-Carbon Silhouette 125B

125mm bathroom/toilet fan with indicator light and back draught shutter.

Model **125B** Stock Ref **446483**

### Lo-Carbon Silhouette 125T (Timer)

125mm bathroom/toilet fan with integral adjustable electronic overrun timer (5-30 minutes), indicator light which operates on manual override only, and back draught shutter.

Model **125T** Stock Ref **446484**

### Lo-Carbon Silhouette 125HT (Humidistat/Timer)

125mm bathroom/toilet fan with integral adjustable auto humidity sensor from 60-90% RH and overrun timer, indicator light which operates on manual override only, and back draught shutter. Datalogger as standard on all Lo-Carbon humidity controlled Silhouette fans.


Model **125HT** Stock Ref **446485**

## Accessories

Model **Wall Kit** Stock Ref **455226**


## Dimensions (mm)

Panel

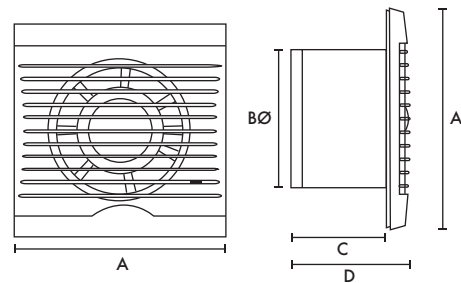

A	BØ	C	D
187	125	131	149

## Performance Guide

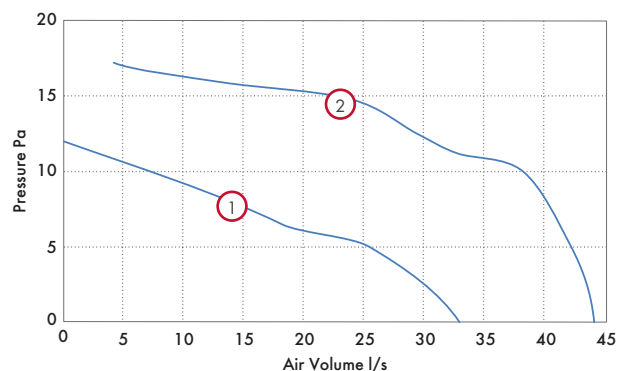

Model	Curve Ref	Extract Performance			Sound dB(A) @ 3m	SFP (W/l/s) @ 0Pa
		m <sup>3</sup> /h	l/s	Watts		
Lo-Carbon Silhouette 125B/T/HT	Low ①	120	33	4.5	33	0.14
	High ②	160	44	8	37	0.18