

Slimpak® (SLPT)

In-Line Twin Duct Fans



Features & Benefits

- Motor Insulation Class B, protected to IP44.
- All units suitable for speed control.
- Quality Assurance to BS EN ISO 9001:1994.
- Performance tested to BS848 Part 1 1980.
- Units suitable as a Run & Standby extract fan or simultaneously running fan.

Performance Guide

Model	RPM	Phase	Duty m³/s @ Pa													Amps		
			0	25	50	100	150	200	250	300	350	400	450	500	550	kW	FLC	SC
2 Pole Run & Standby Performance Guide																		
SLPT200	2450	1	0.11	0.10	0.10	0.08	0.07	0.05	0.03	0.01	-	-	-	-	-	0.09	0.36	1.44
SLPT250	2400	1	0.26	0.25	0.024	0.22	0.20	0.18	0.16	0.14	0.11	0.09	0.04	-	-	0.21	0.90	3.60
SLPT315	2550	1	0.40	0.38	0.37	0.35	0.33	0.31	0.29	0.27	0.25	0.22	0.18	0.14	0.07	0.27	1.15	4.60
2 Pole Simultaneously Running Performance Guide																		
SLPT200	2450	1	0.21	0.20	0.19	0.17	0.15	0.12	0.09	0.06						0.19	0.72	2.88
SLPT250	2450	1	0.46	0.44	0.43	0.41	0.39	0.37	0.34	0.31	0.27	0.22	0.13			0.42	1.80	7.20
SLPT315	2450	1	0.62	0.60	0.58	0.54	0.51	0.47	0.43	0.40	0.36	0.32	0.27	0.21	0.12	0.54	2.30	9.20

FLC = Full Load Current SC = Starting Current

Models

All RED highlighted text **GEN**

All BLUE highlighted text


IND

Duct Fans

Run & Standby Controllers
 ITC Man/Auto ITC-DS12/24hr RVC ELV
 Changeover controller Auto changeover controller Remote visual Indicator Auto Transformer

Stock Ref	Stock Ref	Stock Ref	Stock Ref	Stock Ref*
SLPT200	10314200	10314210	10314220	10314103
SLPT250	10314200	10314210	10314220	10314103
SLPT315	10314200	10314210	10314220	10314103
	Pre Filter Cassette	5 Spare Pre Filters	Bag Filter Cassette	Spare Bag Filter Each
Duct Size	Stock Ref	Stock Ref	Stock Ref	Stock Ref*
200mm	10532200A	10556200A	10533200	10557200
250mm	10532250A	10556250A	10533250	10557250
315mm	10532315A	10556315A	10533315	10557315
		900mm	1200mm	(280mm)
				Duct Attenuator 600mm
				Stock Ref
				Stock Ref

Flexible Connection	Anti-Vibration Mounts	Duct Air Heater
Stock Ref	Stock Ref	Stock Ref
FLX200	10523033	QAH200
FLX250	10523033	QAH250
FLX315	10523033	QAH315

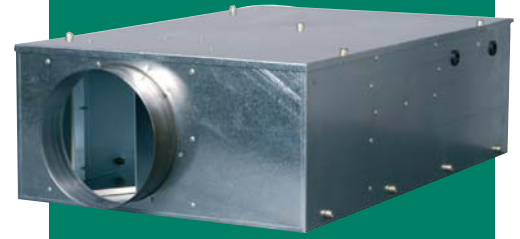

Heat Exchange Unit	Backdraught Shutter	Fast Clamp	Aluminium Flexible Ducting (10M)	Worm Drive Clips
Duct Dia	Stock Ref	Stock Ref	Stock Ref	Stock Ref
200mm	10538290	-	-	-
	+10577315	10542200	10540200	10539200
	+10578315	-	-	-
250mm	10538290	-	-	-
	+10577315	10542250	10540250	10539250
	+10578315	-	-	-
315mm	10538290	-	-	-
	+10577315	10542315	10540315	10539315
				561710

Electronic Speed Controller

Simultaneously Fan Running Controller Guide

Auto Transformer & Coil Starter*

Stock Ref	Stock Ref	Starter Ref	Overload Ref
W10303103M	10314103	444744	444698
W10303103M	10314103	444744	444700
W10303103M	10314103	444744	444700

Duct Attenuator 900mm	Duct Attenuator 1200mm	Joining Piece	Louvre Shutter	3-Way Splitter	Trade Price £
Stock Ref	Stock Ref	Stock Ref	Stock Ref	Stock Ref	Trade Price £
10536200	10537200	561808	10501200	10551250	101.30
10536250	10537250	561810	10501250	10551250	101.30
10536315	10537315	561813	10501315	10553400	169.40

Dimensions

Unit	Weight					
Duct Ø	L	W	H	DØ	X	kg
200	760	490	235	200	205	20
250	865	590	285	250	233	32
315	955	650	350	315	240	39

