



VA140/150 Range Axial Kitchen Fans

Features & Benefits

- VA140/150 Panel models.
- 2 Year Guarantee.
- Thermo electric shutters to prevent back drafts.
- Meets Building Regulations Part F when installed.
- IP44 rated.
- Suitable for wall, ceiling, panel and window mounting.

Kitchen ventilation

VA140/150 Panel models are designed to alleviate the everyday problems that condensation and household odours may cause. Effectively extracts odours and moisture laden air from kitchens giving a healthy and fresh environment.

Building Regulations

Specifically sized to **meet the Building Regulation requirements** for powered extract ventilation in domestic kitchens. All VA140/150 models have a natural trickle Ventilation (unpowered). Control facility fitted as standard. The VA140/150 range is fitted with internal louvres conforming to the latest international safety standards.


Please contact our Customer Service Department for exposed site application.


Performance


Model	Shutter Actuator	Extract Performance FID			Sound dB(A) @ 3m
		m³/h	l/s	Watts	
VA140/150KP	PT	245	68	18.8	36
VA140/150KT	T	245	68	18.8	36
VA140/150KHP	T	245	68	18.8	36
VA140/150KHT	T	245	68	18.8	36
VA140/150VS	PT	100 low 245 boost	28 low 68 boost	18.8	36


**I = Instant, P = Pullcord


Models

VA140/150KP 
Single speed kitchen extract fan with On/Off pullcord. Trickle ventilation facility.
Stock Ref 140120A

VA140/150KT - with timer 
Single speed kitchen extract fan with adjustable overrun timer 3-25 minutes. Trickle ventilation facility.
Stock Ref 140220B

VA140/150KHP - with humidistat 
Single speed humidity-controlled kitchen extract fan with full speed pullcord override. Humidity adjustment 62-82%RH. Trickle ventilation facility.
Stock Ref 140320B

VA140/150KHT - with timer and humidistat 
Humidity controlled kitchen extract fan with adjustable overrun timer (3-25 minutes). Humidity adjustment 62-82% RH. Trickle ventilation facility.
Stock Ref 140420B


VA140/150VS 
Variable speed kitchen extract with a built in adjustable speed controller, which can reduce the speed to 40% of its maximum performance.
Stock Ref 458915

Dimensions (mm)

A	B	C	DØ	E	FØ	G	H
216	224	80	146	60	152	220	37


Weight 1.75kg

Panel

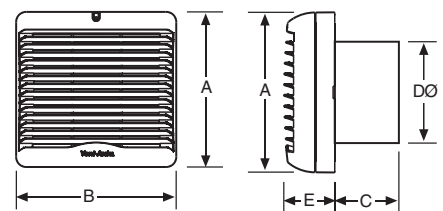

Panel fixing hole Ø 152mm

Wall

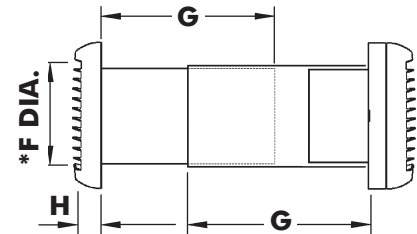

Wall fixing hole Ø 152mm


Wall Kit Stock Ref:

254102 (White)

254100 (Brown)



Window



Window fixing hole Ø 160mm

Window Kit

Stock Ref: **140901A**

